




DANGER

Danger of electrical shock, burns or death. Always remove all power sources before attempting any repair, service or diagnostic work. Power can be present from shore power, generator, inverter or battery. All power sources must be disabled and secured before performing any service.



CAUTION

If you lack the skills, tools or equipment to perform diagnostic or repair work leave such work to an authorized Winnebago Industries dealer or other qualified shop.

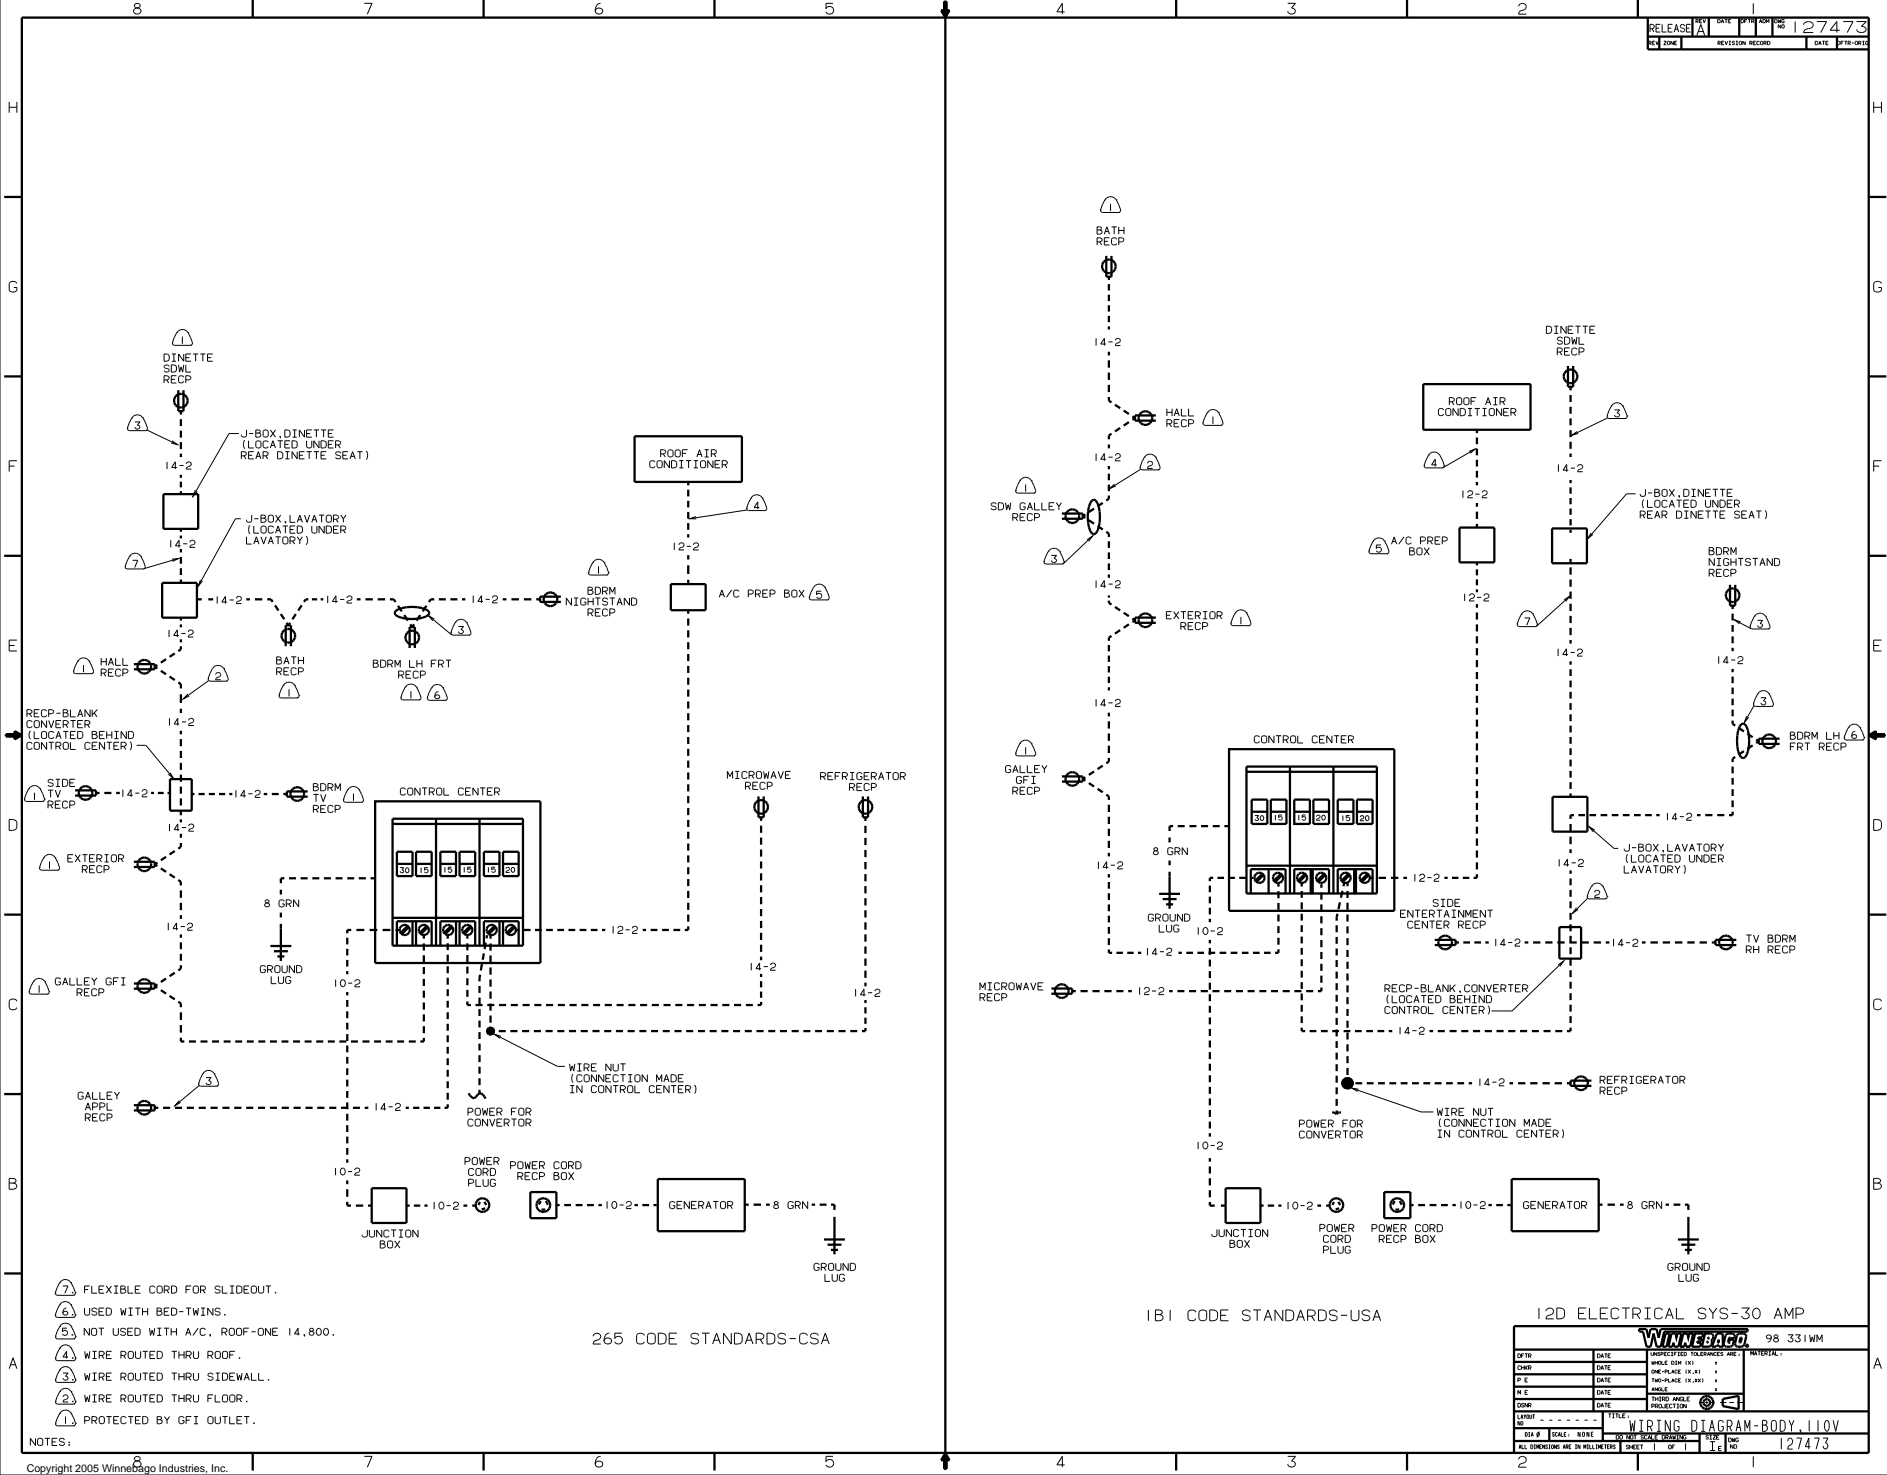

- ⑦ FLEXIBLE CORD FOR SLIDEOUT.
- ⑧ USED WITH BED-TWINS.
- ⑨ NOT USED WITH A/C. ROOF-ONE 14.800.
- ④ WIRE ROUTED THRU ROOF.
- ③ WIRE ROUTED THRU SIDEWALL.
- ② WIRE ROUTED THRU FLOOR.
- ① PROTECTED BY GFI OUTLET.

265 CODE STANDARDS-CSA

IBI CODE STANDARDS-USA

12D ELECTRICAL SYS-30 AMP

| | | |
|-----------------------------------|-------|-------------------------------------|
| WINNEBAGO | | 98 3311M |
| OF IN | DATE | UNDESIGNED TOLERANCES ARE MATERIAL. |
| CHP | DATE | WELD DIM 1:1 |
| DR | DATE | ONE-PLACE 1:1.11 |
| PL | DATE | TWO-PLACE 1:1.111 |
| DR | DATE | ANGLE |
| CONP | DATE | INDUS. WELD PRODUCTION |
| LAHNT | DATE | TITLE |
| DR # | SCALE | NOTE |
| ALL DIMENSIONS ARE IN MILLIMETERS | SHEET | 1 OF 1 |

WIRING DIAGRAM-BODY 110V
127473