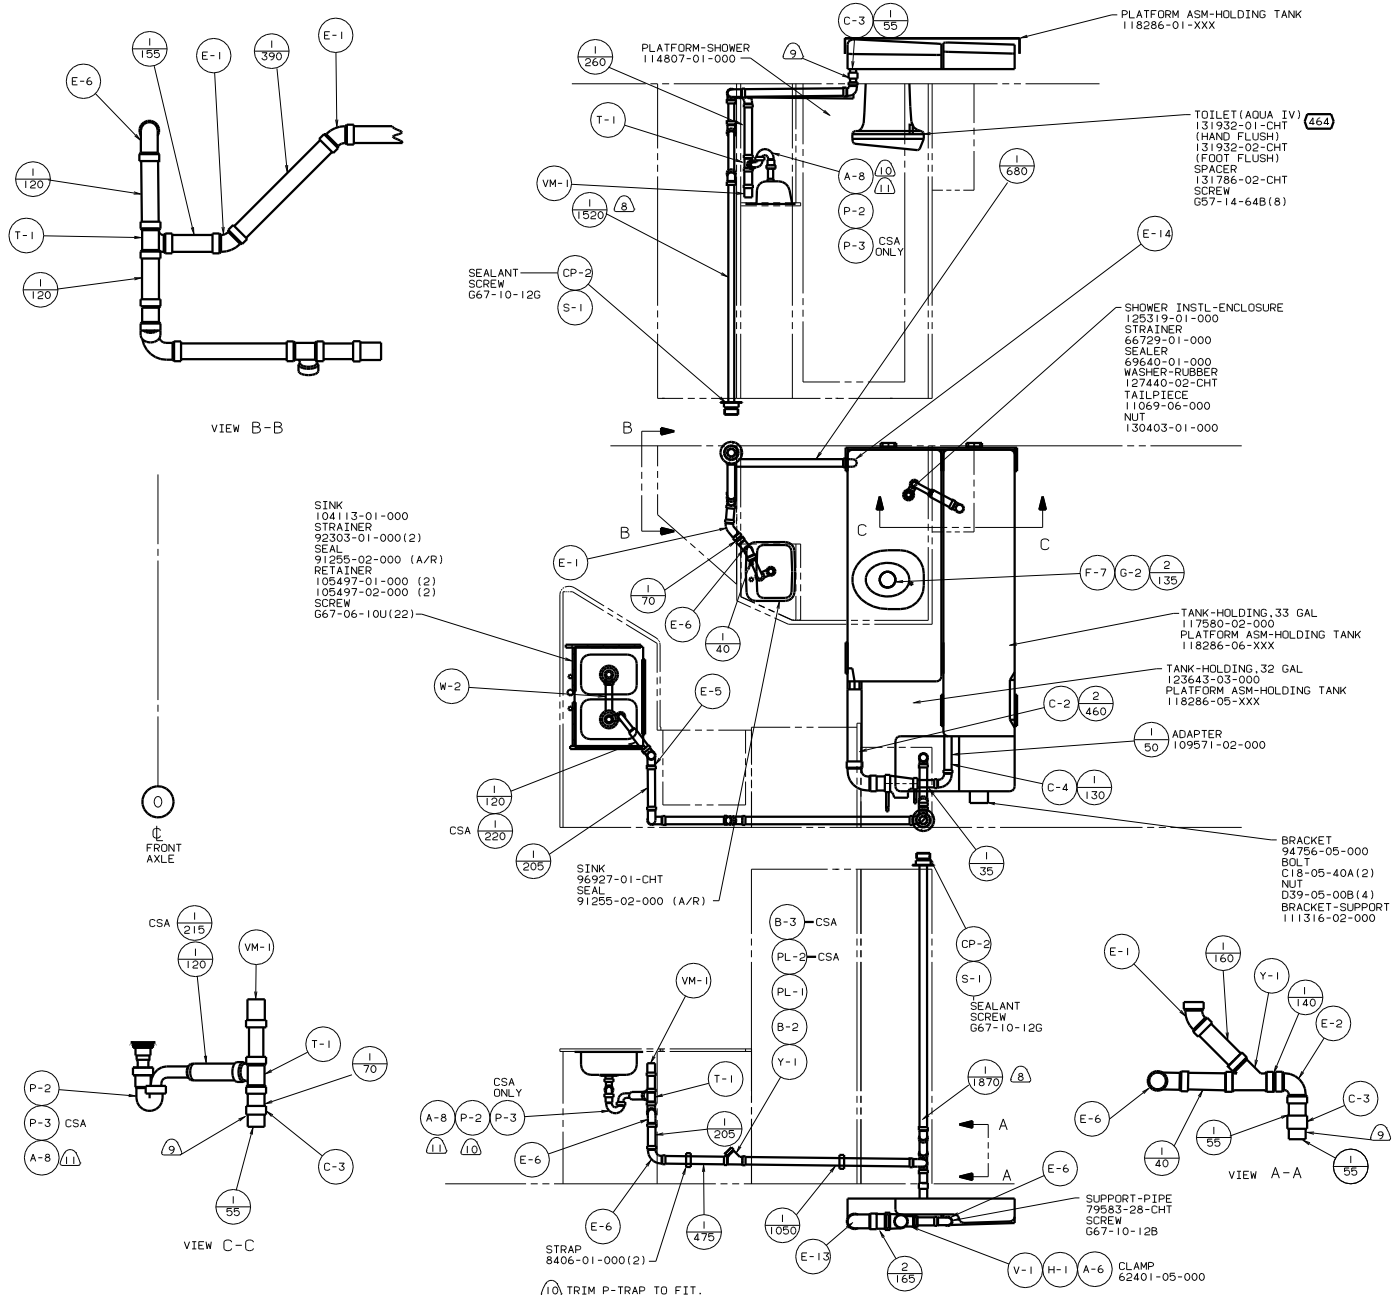

NOTES:

1. SLOPE OF HORIZONTAL PIPING TO BE 6 PER 305 MIN.
2. SLOPE OF TRAP ARM MUST BE 6 PER 305.
3. ALL PIPE AND FITTINGS TO BE ASSEMBLED WITH SOLVENT 4020-01-000.
4. ALL EXTERIOR OPENINGS AROUND PIPE TO BE SEALED WITH 110744-01-000.
5. FOR CAN UNITS EACH HOLDING TANK SHALL HAVE A CSA APPROVAL STAMPED NEAR THE IAMPO APPROVAL.
6. SEAL ALL AROUND SHOWER WITH SILICONE.
7. SEE DWG 61607-01-000 FOR INSTL OF GROMMETS.
8. VENT PIPE MUST PROJECT 51 MM MIN AND 63.5 MM MAX ABOVE ROOF FOR PROPER FIT AND FUNCTION.
9. SECURE VENT TUBES TO FLOOR WITH BRACKET 95061-01-000(2),CLAMP 62401-02-000, SCREW G67-10-12B(2).
10. TRIM P-TRAP TO FIT.
11. NOT USED ON CANADIAN UNITS.

464 TOILET

X-X FOR DRAINAGE CALLOUTS SEE DWG NO. 116229-01-000

WINNEBAGO 00 429U

DRAINAGE SYSTEM INSTL

133460

REF: 118444 T

Copyright 2005 Winnebago Industries, Inc.

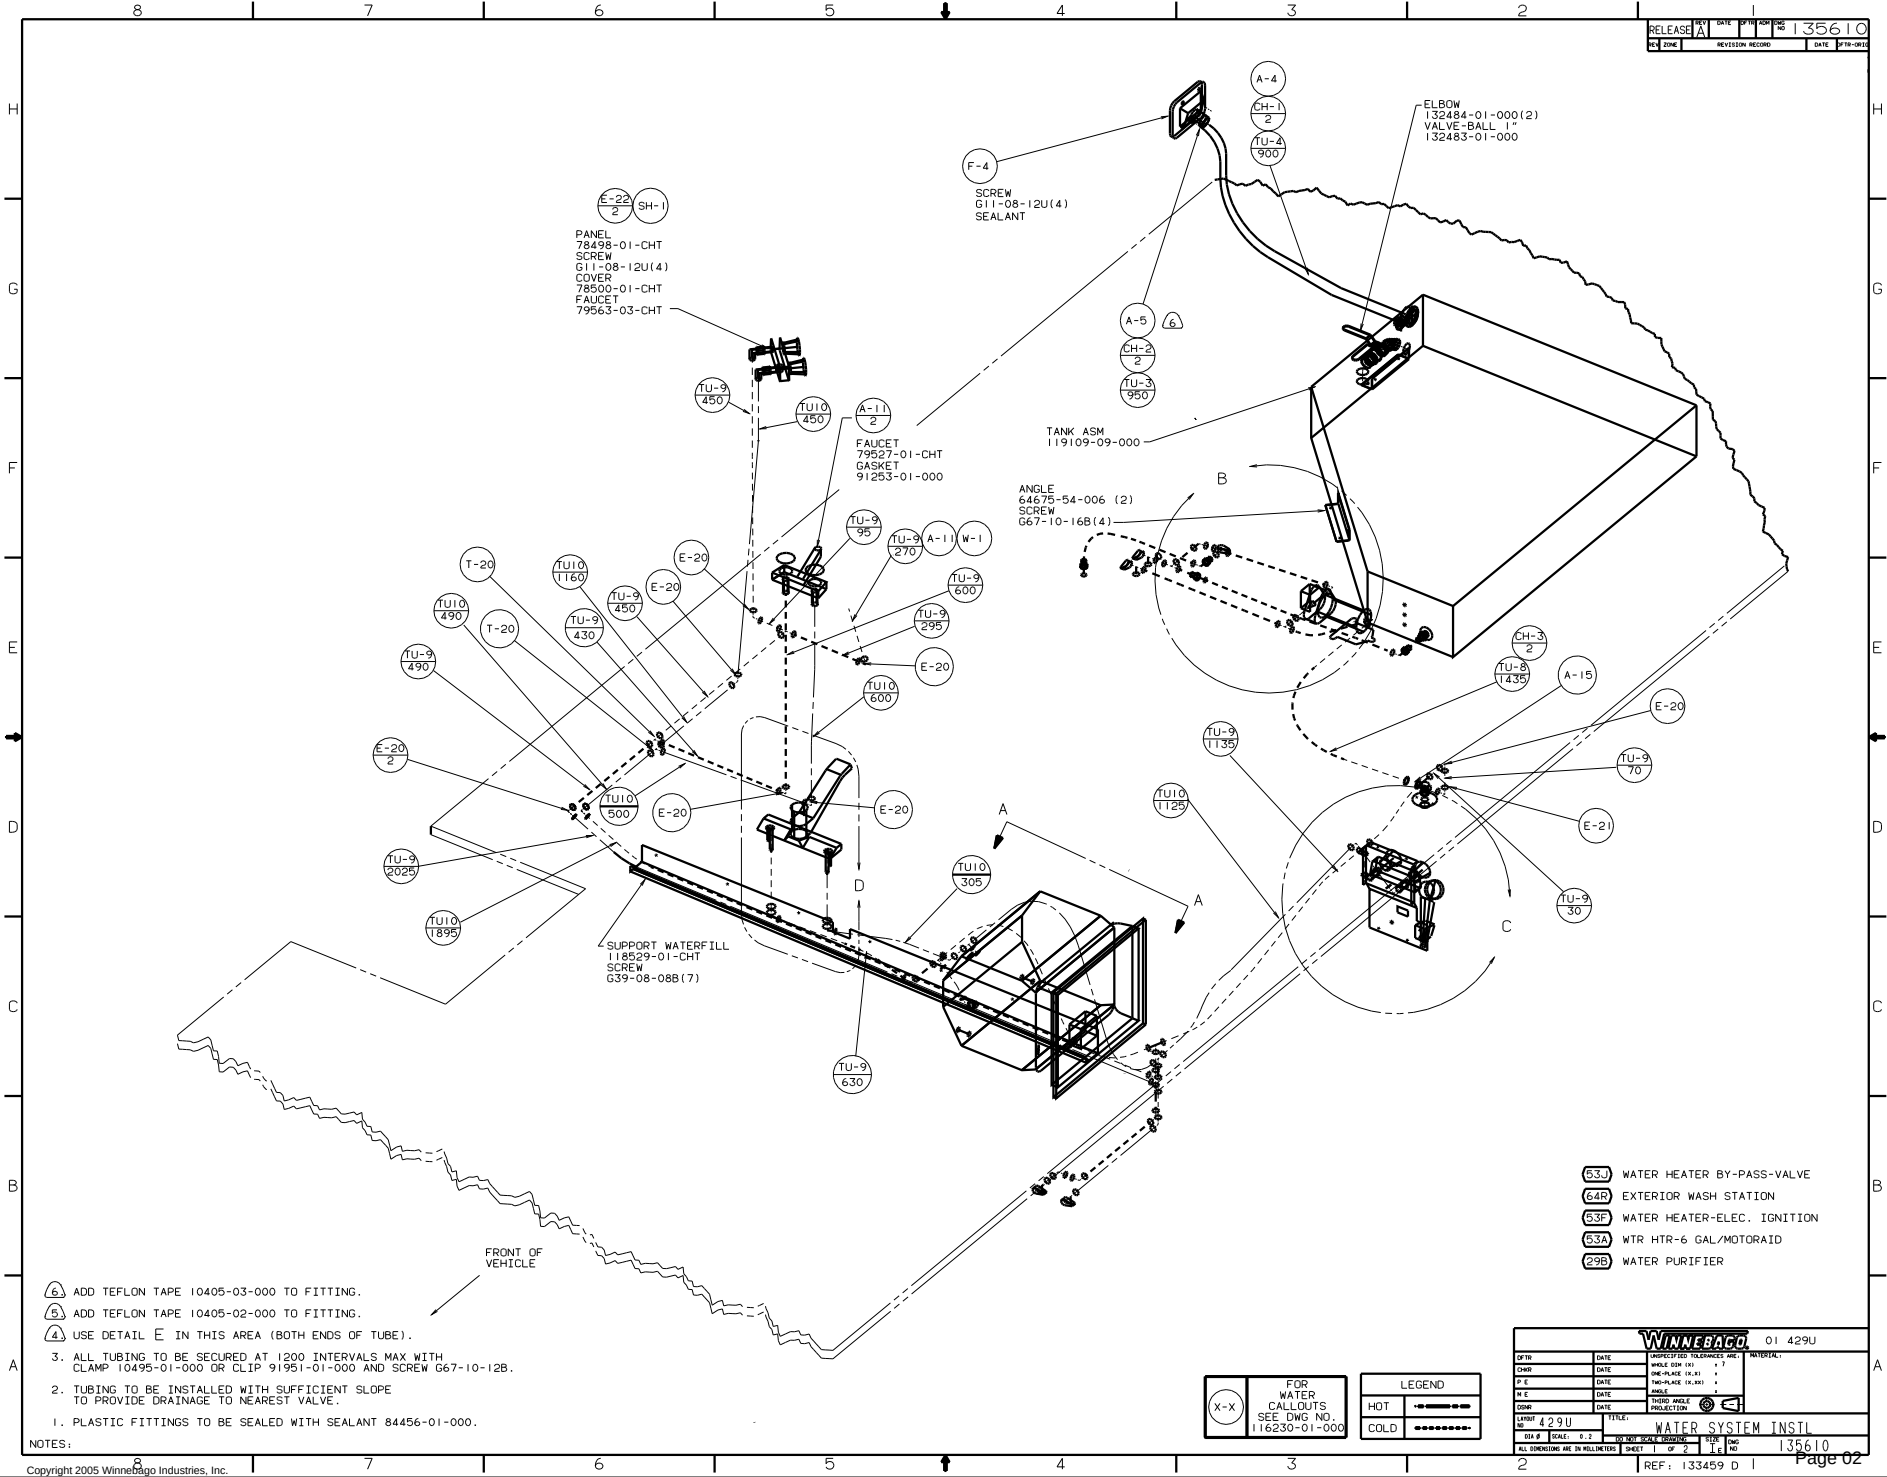
RELEASE A
135610
REVISION RECORD
ELBOW
132484-01-000(2)
VALVE-BALL 1"
132483-01-000
F-4
SCREW
G11-08-12U(4)
SEALANT
PANEL
78498-01-CHT
SCREW
G11-08-12U(4)
COVER
78500-01-CHT
FAUCET
79563-03-CHT
FAUCET
79527-01-CHT
GASKET
91253-01-000
TANK ASM
119109-09-000
ANGLE
64675-54-006 (2)
SCREW
G67-10-16B(4)
SUPPORT WATERFILL
118529-01-CHT
SCREW
G39-08-08B(7)
FRONT OF VEHICLE
6. ADD TEFLON TAPE 10405-03-000 TO FITTING.
5. ADD TEFLON TAPE 10405-02-000 TO FITTING.
4. USE DETAIL E IN THIS AREA (BOTH ENDS OF TUBE).
3. ALL TUBING TO BE SECURED AT 1200 INTERVALS MAX WITH CLAMP 10495-01-000 OR CLIP 91951-01-000 AND SCREW G67-10-12B.
2. TUBING TO BE INSTALLED WITH SUFFICIENT SLOPE TO PROVIDE DRAINAGE TO NEAREST VALVE.
1. PLASTIC FITTINGS TO BE SEALED WITH SEALANT 84456-01-000.
NOTES:
53J WATER HEATER BY-PASS-VALVE
64R EXTERIOR WASH STATION
53F WATER HEATER-ELEC. IGNITION
53A WTR HTR-6 GAL/MOTORAID
29B WATER PURIFIER
X-X FOR WATER CALLOUTS SEE DWG NO. 116230-01-000
LEGEND
HOT
COLD
WINNEBAGO
01 429U
WATER SYSTEM INSTL
135610
REF: 133459 D 1
Copyright 2005 Winnebago Industries, Inc.
Page 02

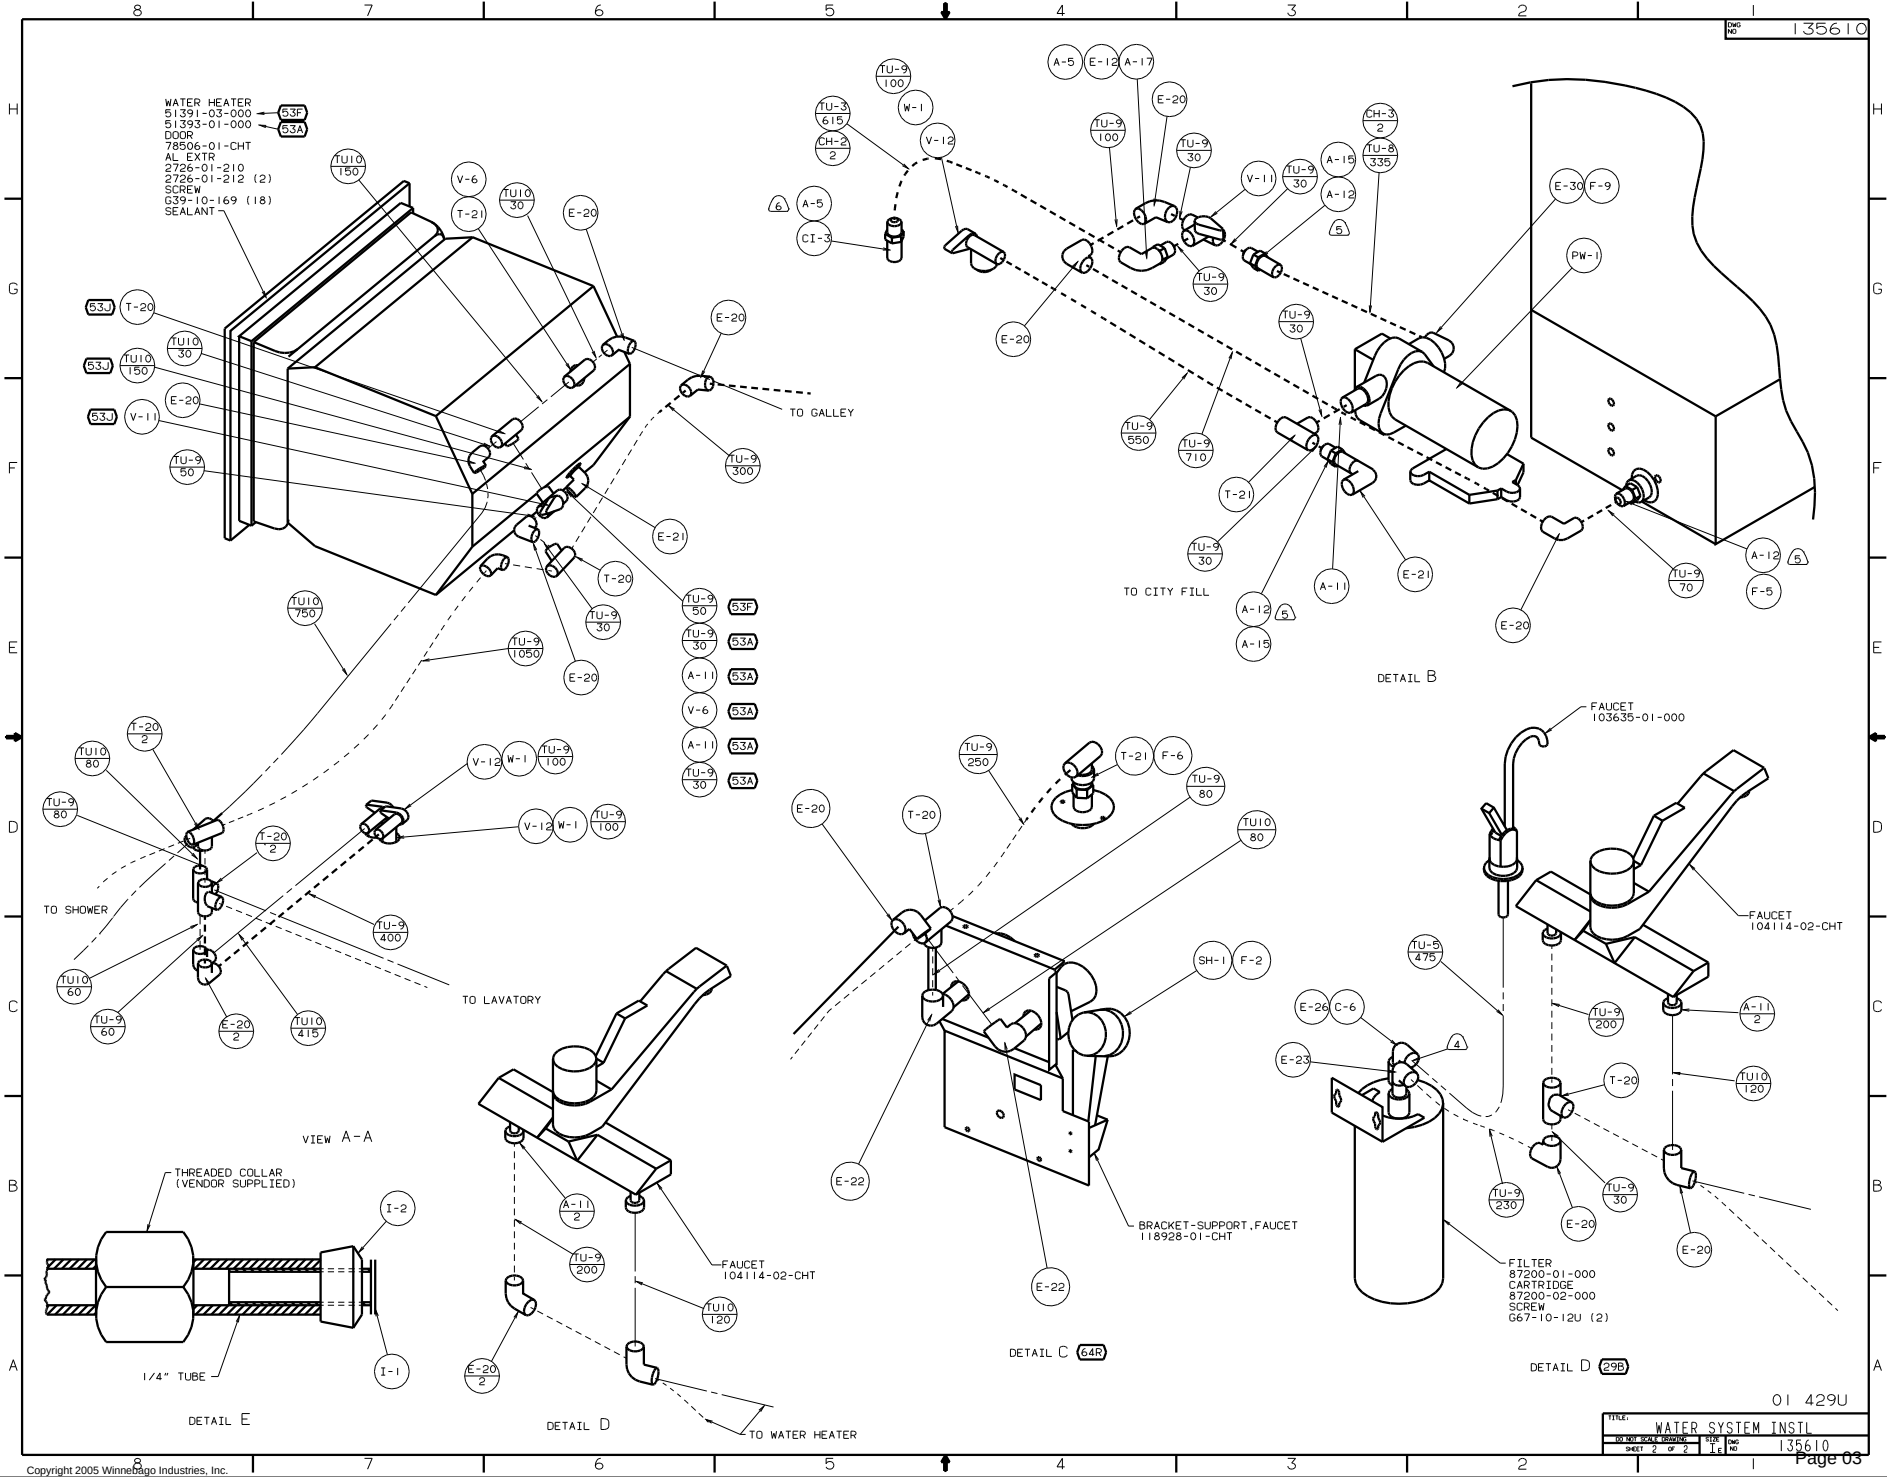

Copyright 2005 Winnebago Industries, Inc.