




DANGER

Danger of electrical shock, burns or death. Always remove all power sources before attempting any repair, service or diagnostic work. Power can be present from shore power, generator, inverter or battery. All power sources must be disabled and secured before performing any service.



CAUTION

If you lack the skills, tools or equipment to perform diagnostic or repair work leave such work to an authorized Winnebago Industries dealer or other qualified shop.

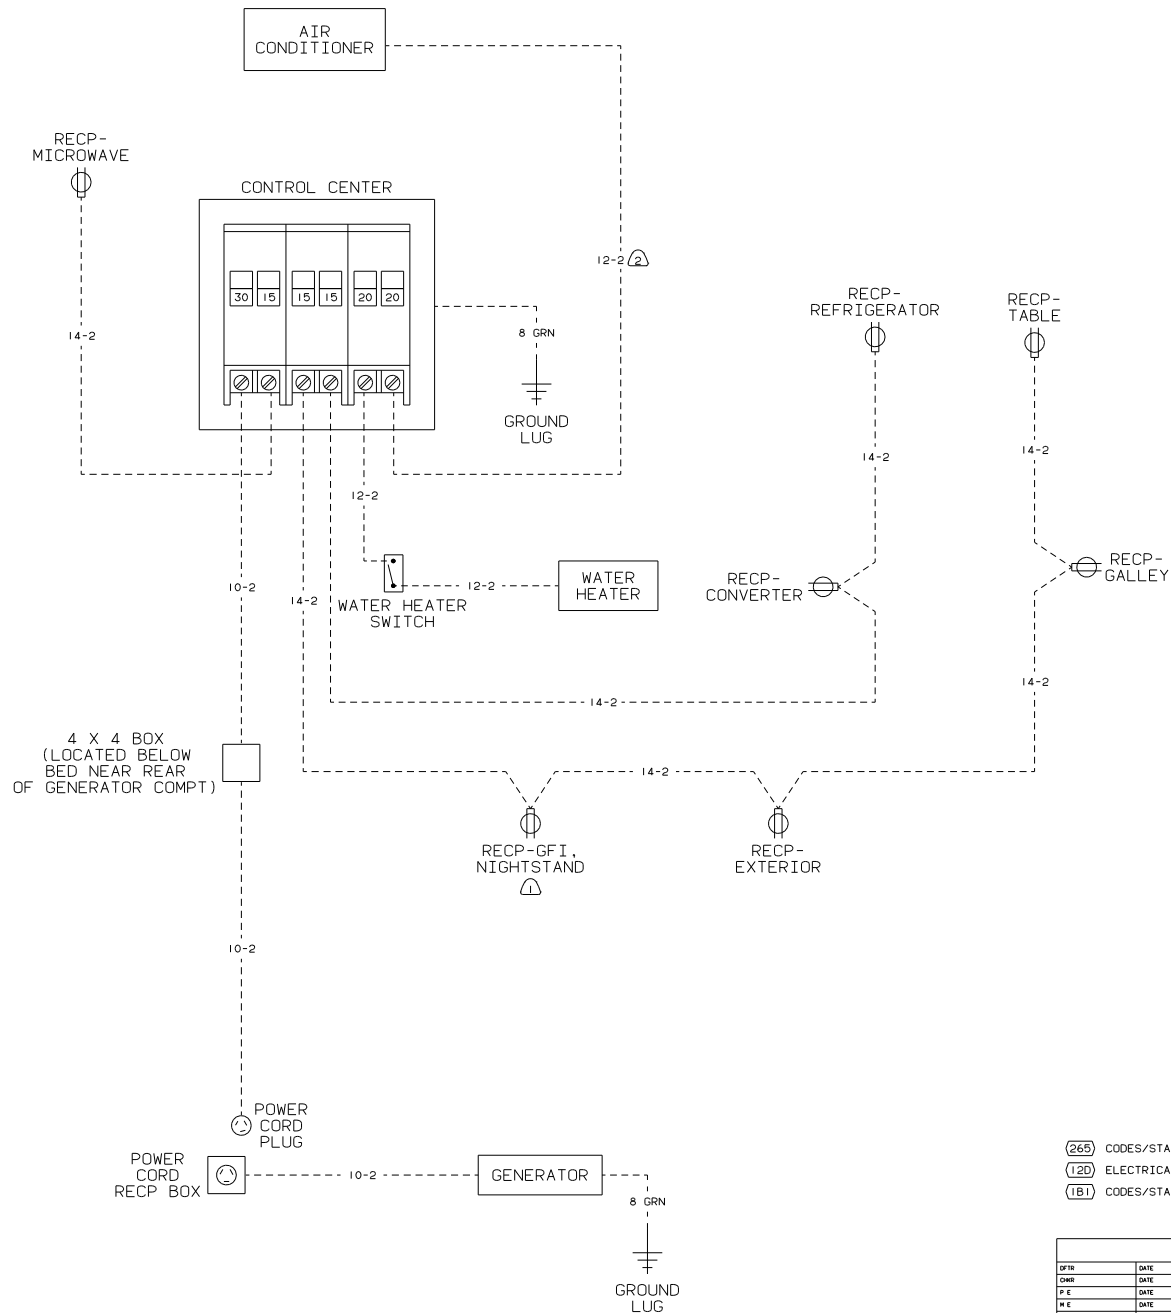

NOTES:
 (2) WIRE ROUTED THRU ROOF.
 (1) ALL OUTLETS DOWN STREAM AND INCLUDING THIS OUTLET ARE GROUND FAULT CIRCUIT INTERRUPT PROTECTED.

- (265) CODES/STANDARDS-CSA/CMVSS
- (120) ELECTRICAL SYSTEM 30 AMP
- (1B1) CODES/STANDARDS USA

(120) (1B1) (265)

WINNEBAGO 02 222FD

DATE	DATE	UNSPECIFIED TOLERANCES ARE:	MATERIAL
DATE	DATE	1/16" (0.0625")	
DATE	DATE	1/8" (0.125")	
DATE	DATE	3/16" (0.1875")	
DATE	DATE	1/2" (0.5000")	
DATE	DATE	3/4" (0.7500")	
DATE	DATE	1" (1.0000")	
DATE	DATE	1 1/2" (1.5000")	
DATE	DATE	2" (2.0000")	
DATE	DATE	3" (3.0000")	
DATE	DATE	4" (4.0000")	
DATE	DATE	6" (6.0000")	
DATE	DATE	8" (8.0000")	
DATE	DATE	10" (10.0000")	
DATE	DATE	12" (12.0000")	
DATE	DATE	14" (14.0000")	
DATE	DATE	16" (16.0000")	
DATE	DATE	18" (18.0000")	
DATE	DATE	20" (20.0000")	
DATE	DATE	24" (24.0000")	
DATE	DATE	30" (30.0000")	
DATE	DATE	36" (36.0000")	
DATE	DATE	42" (42.0000")	
DATE	DATE	48" (48.0000")	
DATE	DATE	54" (54.0000")	
DATE	DATE	60" (60.0000")	
DATE	DATE	72" (72.0000")	
DATE	DATE	84" (84.0000")	
DATE	DATE	96" (96.0000")	
DATE	DATE	108" (108.0000")	
DATE	DATE	120" (120.0000")	