




**DANGER**

**Danger of electrical shock, burns or death.** Always remove all power sources before attempting any repair, service or diagnostic work. Power can be present from shore power, generator, inverter or battery. All power sources must be disabled and secured before performing any service.



**CAUTION**

If you lack the skills, tools or equipment to perform diagnostic or repair work leave such work to an authorized Winnebago Industries dealer or other qualified shop.

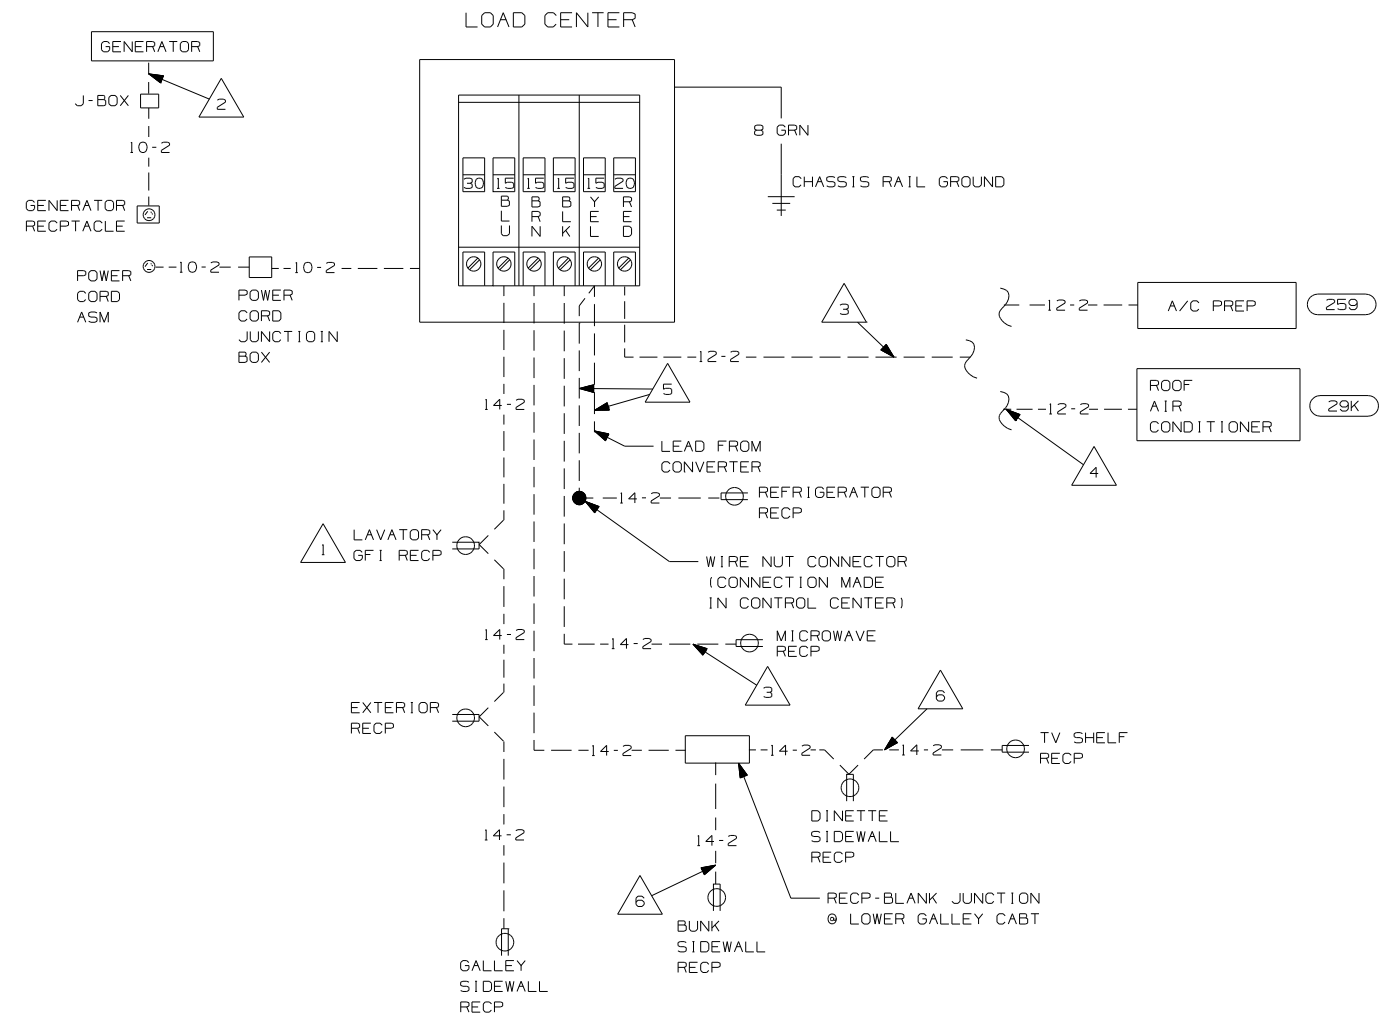

- (29K) A/C ROOF-ONE 7,000 BTU
- (259) A/C ROOF-WITHOUT
- (265) CODES/STANDARDS-CSA/CMVSS
- (12D) ELECTRICAL SYSTEM 30 AMP
- (39A) EXT RECEPTACLE DPLX 120VAC
- (1B1) CODES/STANDARDS USA

- (6) WIRE LAID UP IN SIDEWALL.
- (5) LEAD SUPPLIED WITH CONVERTER.
- (4) WIRE ROUTED THRU ROOF.
- (3) WIRE ROUTED THRU SIDEWALL.
- (2) WIRE ROUTED THRU SEALED CONDUIT.
- (1) ALL OUTLETS DOWN STREAM AND INCLUDING THIS OUTLET ARE GROUND FAULT INTERRUPT PROTECTED.

NOTES:

<b>WINNEBAGO</b>		COPYRIGHT 2003 WINNEBAGO INDUSTRIES, INC.	
DFTR	ORIG. DATE	ALL DIMENSIONS ARE IN MILLIMETERS	
CHKR		FIRST USED	
P.E.		03 221B	
M.E.		UNSPECIFIED TOLERANCES ARE:	
DSNR		MATERIALS:	
		WHOLE DIM (X)	:
		ONE-PLACE (X.X)	:
		TWO-PLACE (X.XX)	:
		ANGLE	:
THIRD ANGLE PROJECTION			
DO NOT SCALE DRAWING			
TITLE: WIRING DIAGRAM-BODY, 110V			
SHEET 1 OF 1	PART NO	141839	
REF: 139489		1 02/28/03	