




DANGER

Danger of electrical shock, burns or death. Always remove all power sources before attempting any repair, service or diagnostic work. Power can be present from shore power, generator, inverter or battery. All power sources must be disabled and secured before performing any service.



CAUTION

If you lack the skills, tools or equipment to perform diagnostic or repair work leave such work to an authorized Winnebago Industries dealer or other qualified shop.

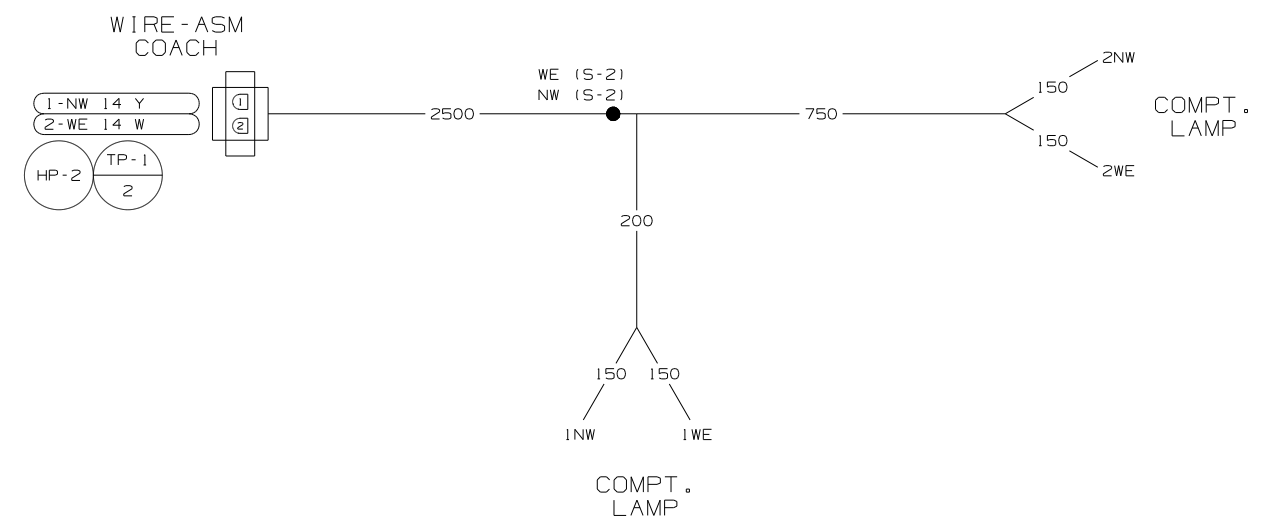

5. COVER WITH MINIMUM POSSIBLE DIAMETER CONDUIT 41953-01, -02, -03, -06, -07, -08, -15-000 AS REQUIRED. SECURE BOTH ENDS WITH TAPE 8363-01-000 TO WIRE ASM.


4. ALL WIRES W/O TERMINALS TO BE STRIPPED 10MM UNLESS OTHERWISE SPECIFIED.

3. DIMENSIONS SHOWN SHALL BE CONSIDERED AS BETWEEN CENTERS OF JUNCTIONS OR BRANCHES. DIMENSIONS SHOWN BETWEEN JUNCTIONS AND CONNECTIONS OR TERMINALS ARE TO END OF WIRE.

2. WIRE ASSEMBLY TO BE SECURED BY WRAP OF TAPE 610 MAX APART AND AT EACH JUNCTION OR BRANCH USING 7957-01-000 TAPE.

1. TOLERANCES TO BE AS FOLLOWS UNLESS OTHERWISE SPECIFIED:
 A. TOLERANCE OF CUT WIRE LENGTHS SHALL BE +13, -0 OR +1%, -0% WHICHEVER IS LARGER.
 B. TOLERANCE BETWEEN JUNCTIONS OR BRANCHES SHALL BE +13, -0. SHALL NOT BE CUMULATIVE.

NOTES:

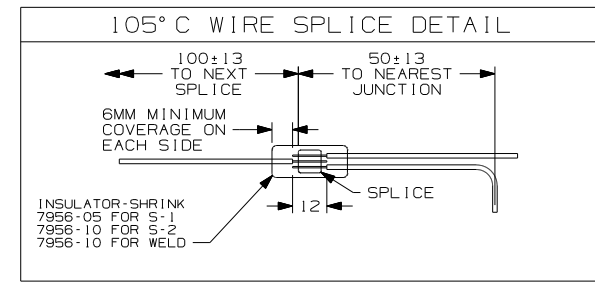

X-X FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

WINNEBAGO		COPYRIGHT 2006 WINNEBAGO INDUSTRIES, INC.	
DFTF	ORIG. DATE	ALL DIMENSIONS ARE IN MILLIMETERS	
CHKR		MATERIAL:	
P.E.		WHOLE DIM (X)	1
M.E.	FIRST USED	ONE-PLACE (X.X)	
DSNR	08 P37H	TWO-PLACE (X.XX)	
UNSPECIFIED TOLERANCES ARE:		ANGLE	
		THIRD ANGLE PROJECTION	
DO NOT SCALE DRAWING			
TITLE: WIRE ASM-COMPT, LAMP			
SHEET 1 OF 1	PART NO	164597	REV
REF:	1 5/24/2007		